



## For Cassiopeia BE-300

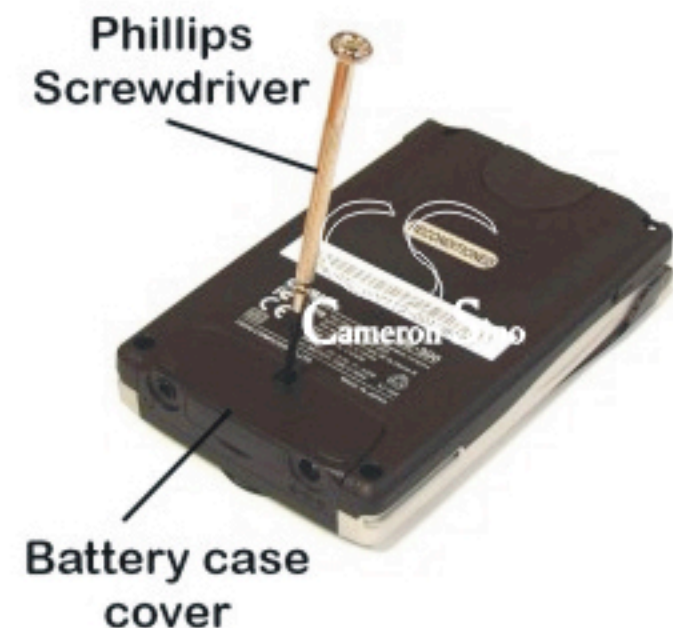


### Step: 1

Using the included Phillips-head screwdriver single screw from the battery case cover located back of the PDA. The battery cover should unsnap form the PDA.

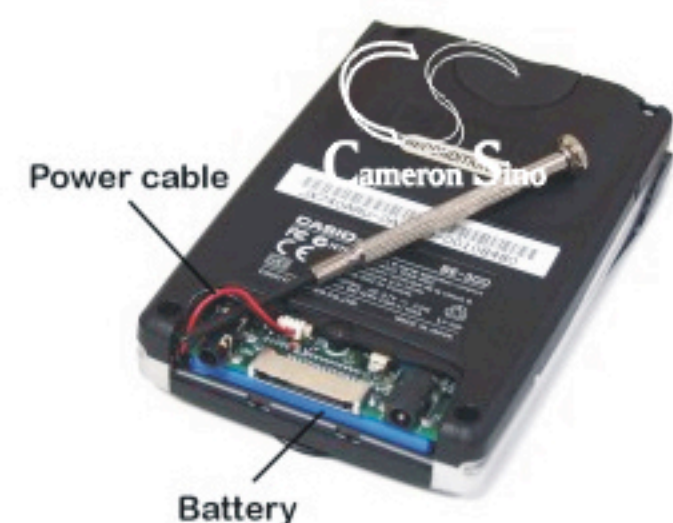

### Step: 2

Untuck the battery power cables from under the case cover with the tip of the screwdriver. Once the power cables are free, gently pull the power connector out of the socket.

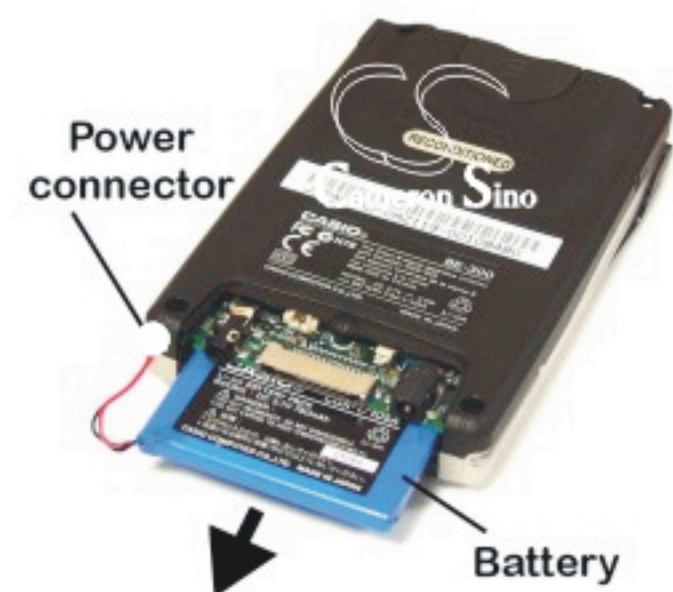

### Step: 3

Once the power cable is disconnected carefully pull one the power cable to remove the battery from the compartment. the Battery should easily slide out.

Apply the new battery within the battery compartment. Please pay attention to have the original orientation cable towards the bottom of the PDA.

Connect the power cable by positioning it within the socket on the motherboard. You can push the into the socket with your finger or with the tip of the screwdriver. Remember to tuck the excess power cable back under the case so that the case cover will fit.

Snap on the cover and put back the single screw.

Your new battery will need a minimum of three hours of charging before first use.